



GSM/GPS/UMTS/WiFi ANTENNA

Antenna GSM/UMTS/GPS/WiFi
Screw Mount R41,
SMA(m)/SMA(m)/RP-SMA(pin f),
3x RG174/3m, 3M

AO-AKOM-41SSSRP

SECTRON company offers a wide portfolio of GSM/GPS/UMTS/Wi-Fi antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.



BENEFITS


- Easy installation
- High frequency range
- High gain

FEATURES

AO-AKOM-41SSSRP


Technology	GSM/GPS/UMTS/WIFI
Frequency bands	900/1575.42/1800/2100/2400 MHz
Bandwidth	-
Gain	0.2/32/8/6 dBi
LNA Gain	30 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Directional
Beam angle	Attached graphs below
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	Ø 80 x 43,95 mm
Weight	192.45 g
Operating temperature	-30 to +90 °C
Execution	External
Method of attachment	Screw Mount
Cable type	3 x RG174U
The cable length	3 x 3 m
Connector type	2 x SMA(m) – GSM/GPS, 1x SMA-RP(f-pin) Wi-Fi
Certification	ISO 9001, ISO 14001

DRAWING

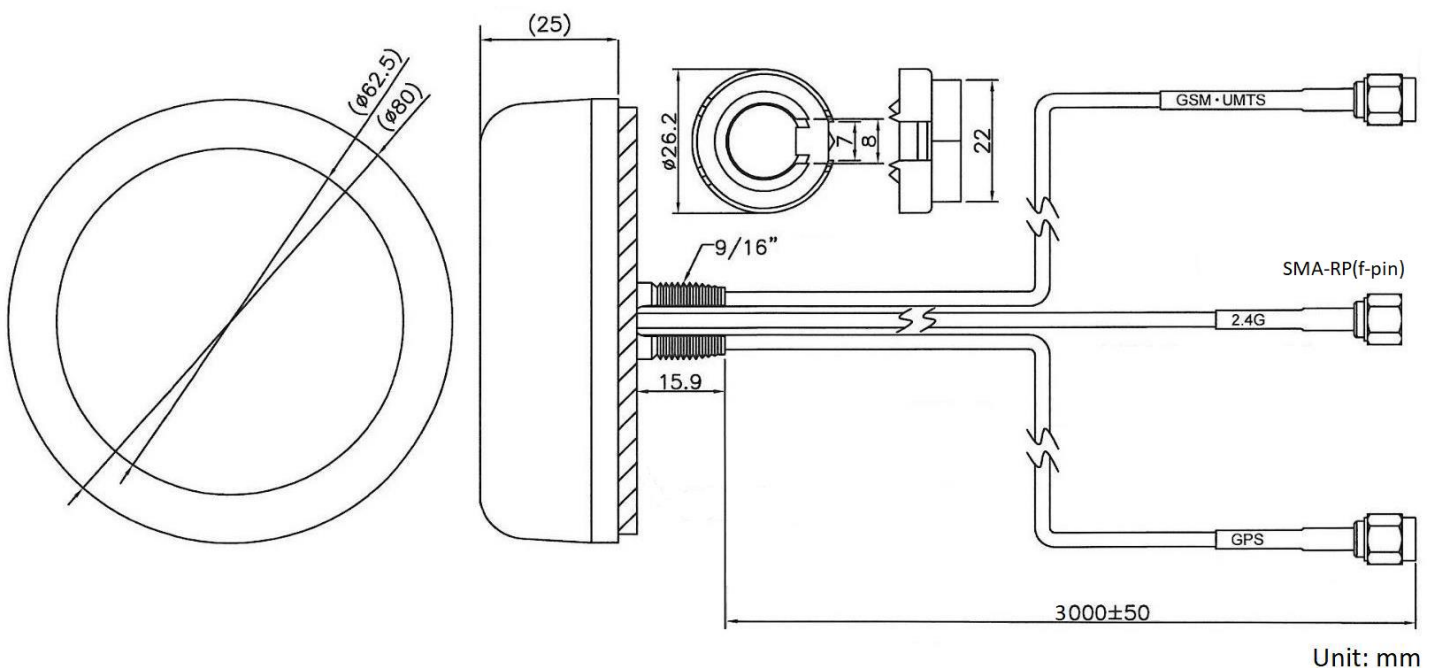


Frequency [MHz]	Return Loss [dB]	VSWR	Efficiency [%]	Gain [dBi]
1575.42 (GPS)	-17.59	1.3	-	32.27
900 (GSM)	-8.44	2.23	40.83	0.21
1800 (UMTS)	-12.48	1.61	79.62	8.52
2100 (UMTS)	-8.13	2.29	26.18	2.47
2400 (Wi-Fi)	-12.29	1.64	59.43	6.2
2450	-17.34	1.36	54.2	4.91
2500	-20.43	1.21	47.21	4.33


S11-GPS


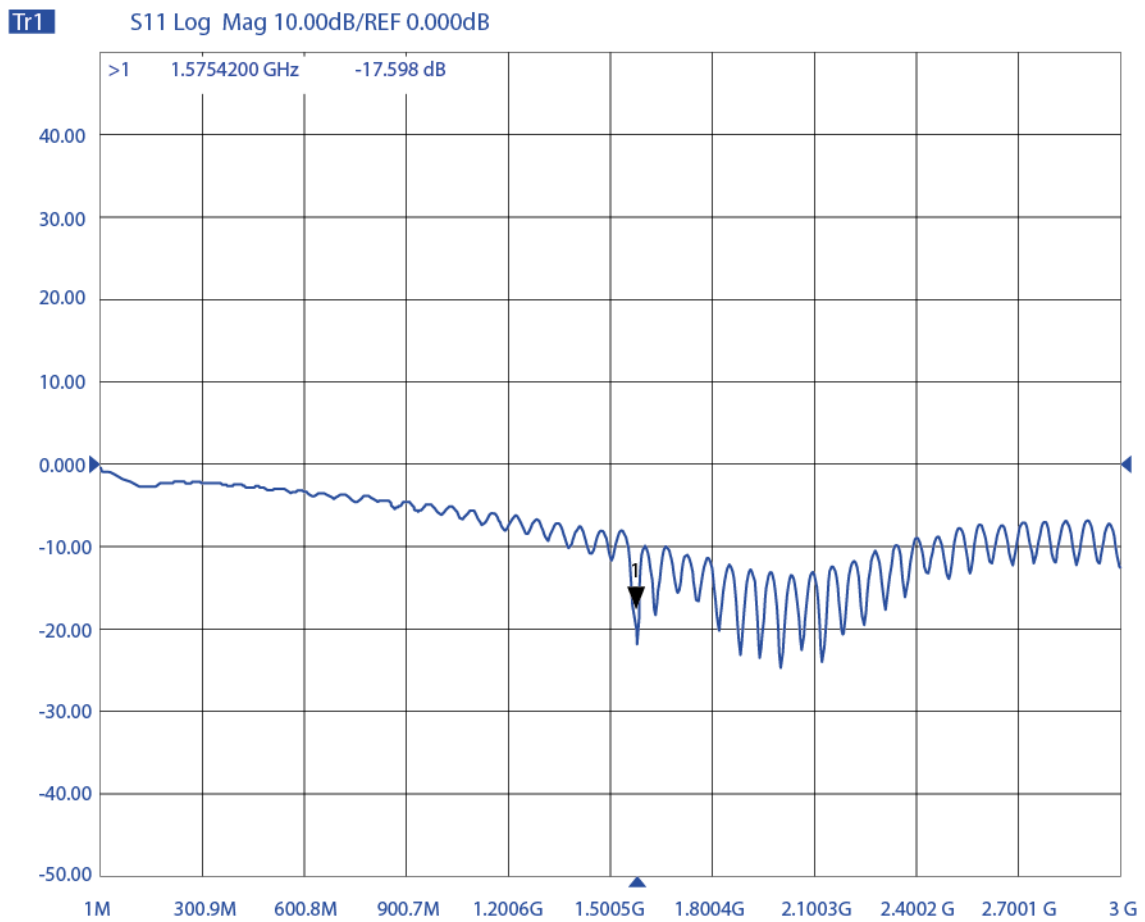


S11-GSM/UMTS

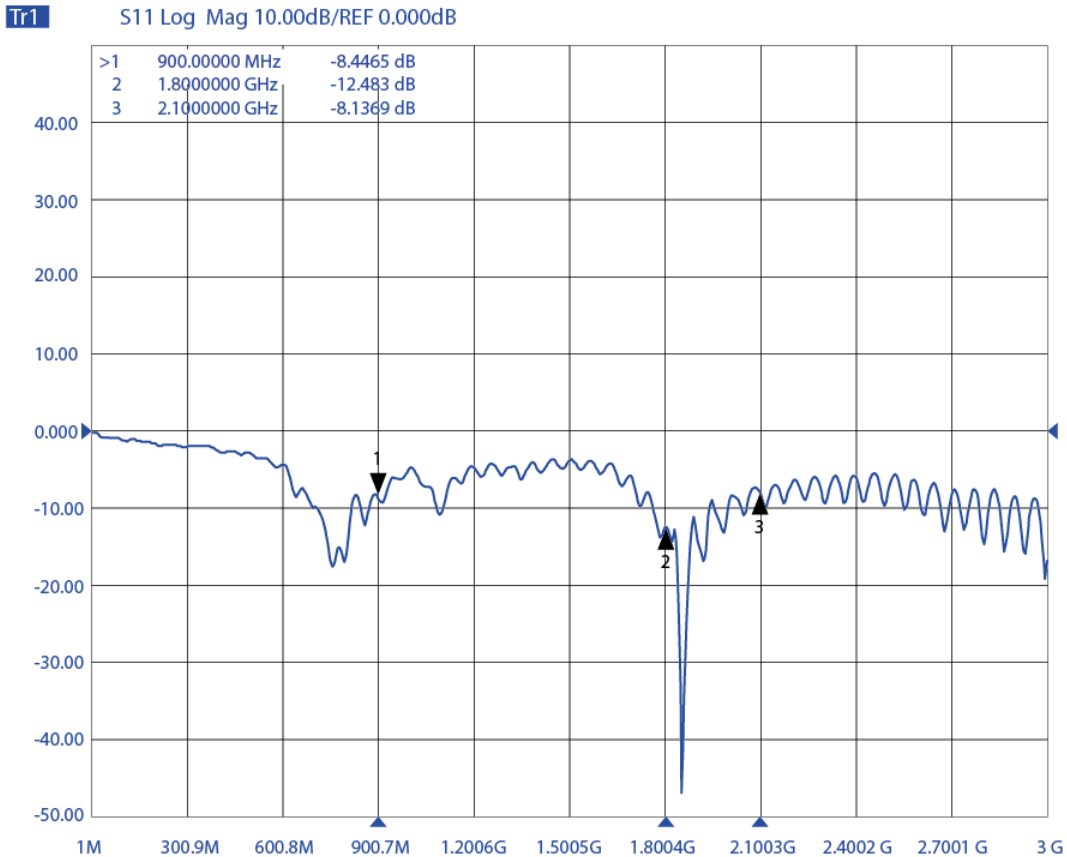


S11-Wi-Fi

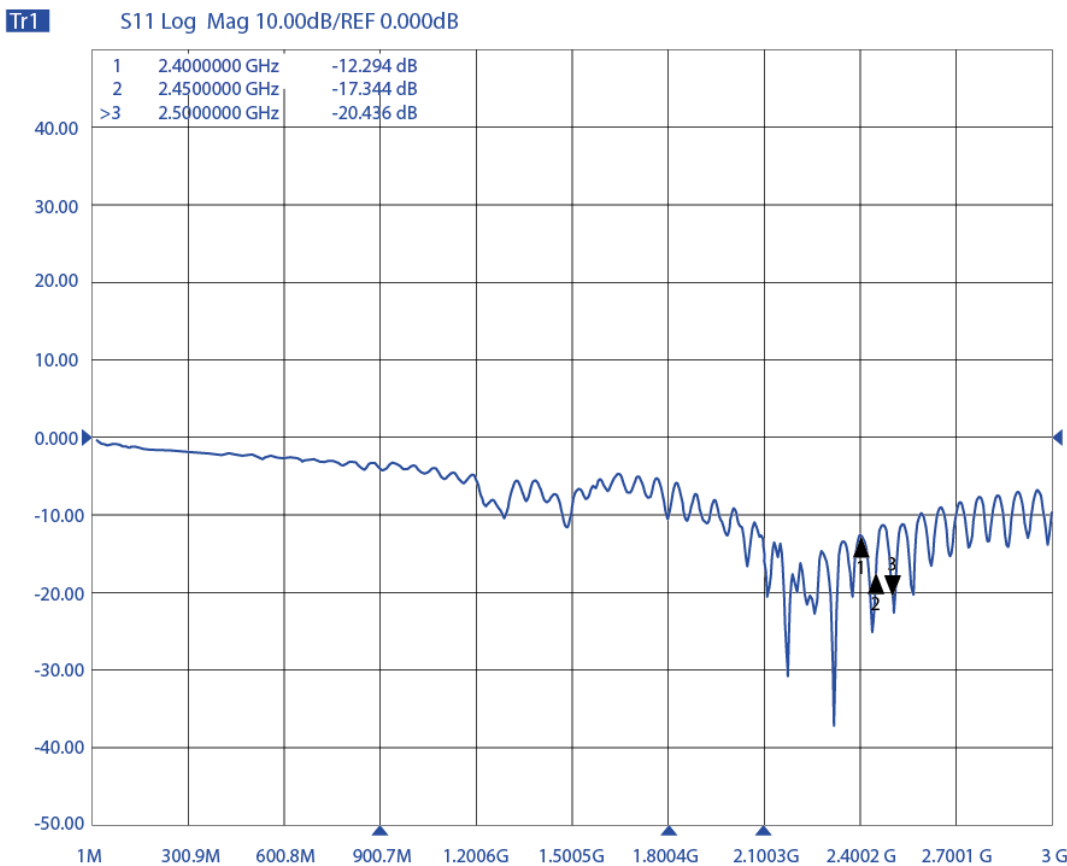

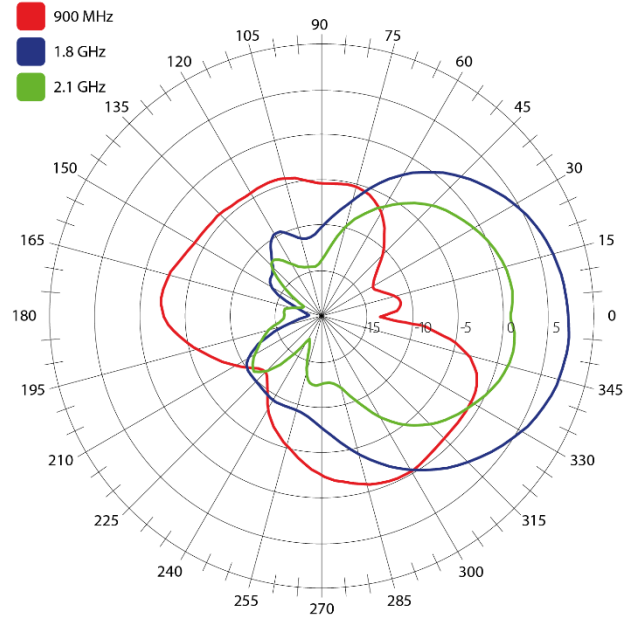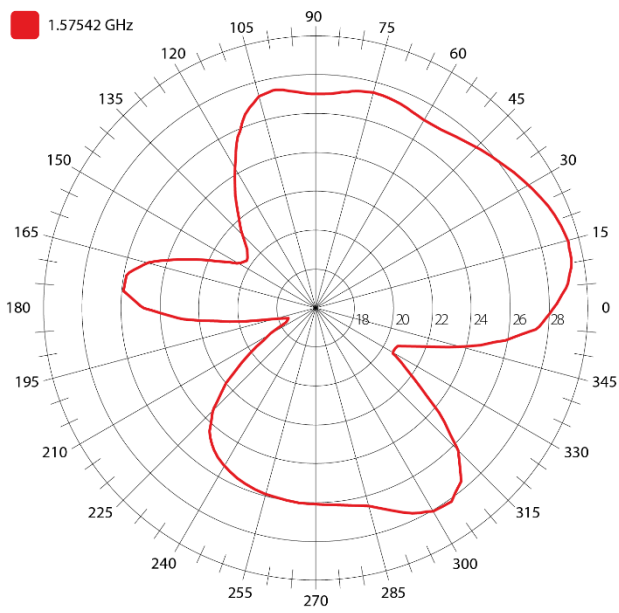

RADIATION PATTERN

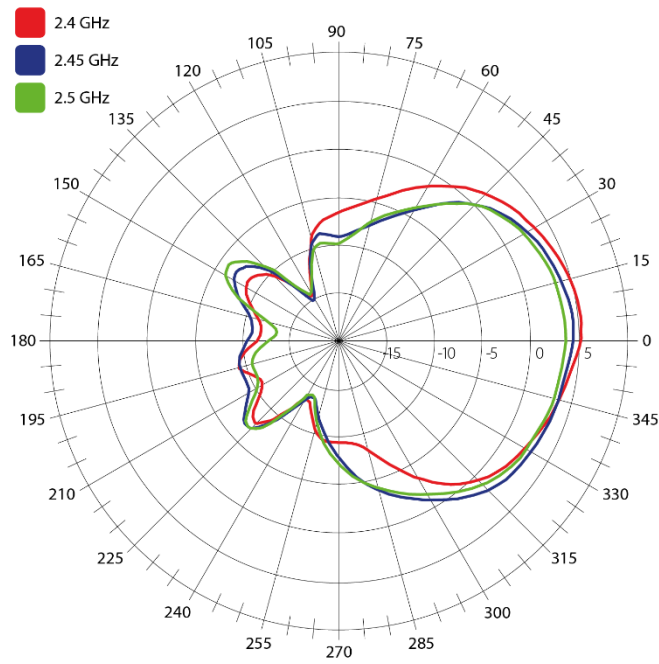

VARIANTS

Different connector variants or cable lengths are available on request.

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12
709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ
Tel.: +420 556 621 020