



ISM ANTENNA

Antenna ISM Connector
Mount G410, 868 MHz,
90°/180°, 3 dBi, SMA(m)

AO-A868-G410S

SECTRON company offers a wide portfolio of ISM antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.






BENEFITS

- Adjustable angle
- No cable required

Technology	ISM/ZigBee/LoRa/SigFox
Frequency bands	868 MHz
Bandwidth	8 MHz
Gain	3 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	197 x 12.9 / 173 x 37.3 x 12.9 mm
Weight	26 g
Operating temperature	-40°C to +85°C
Execution	External
Method of attachment	Connector Mount
Cable type	-
The cable length	-
Connector type	SMA(m)

DRAWING

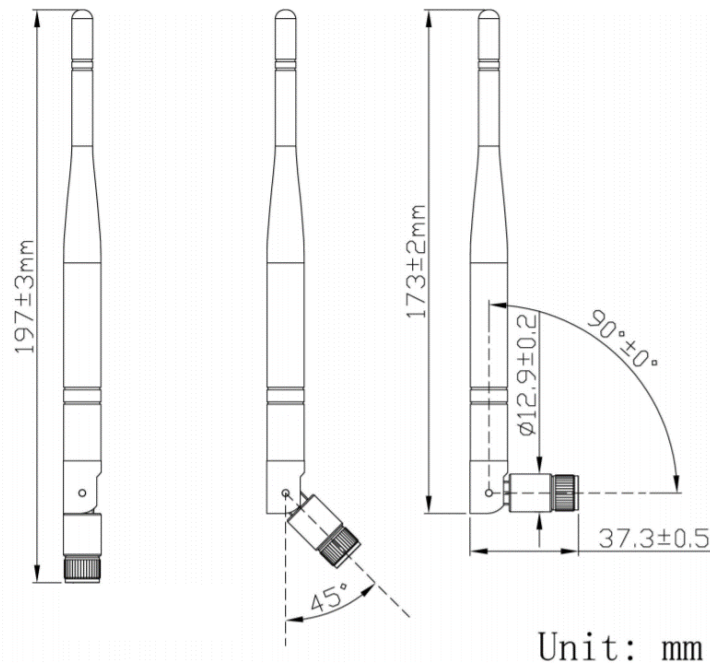

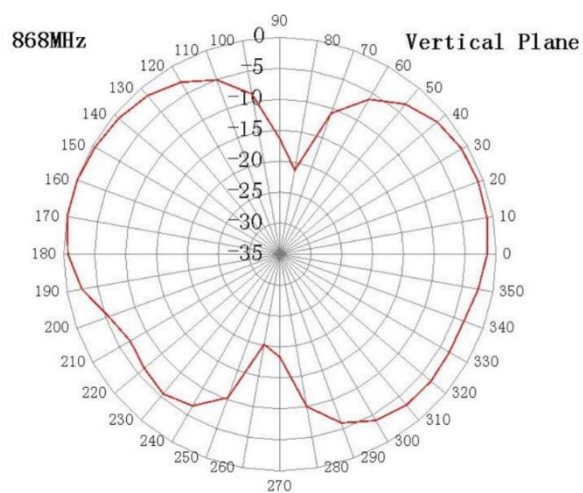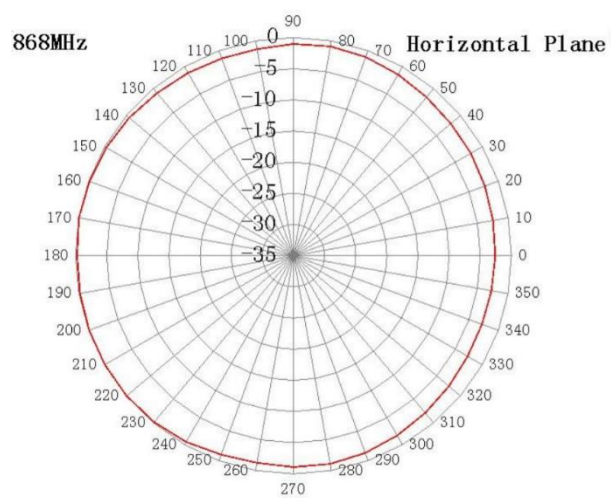

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12
709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ
Tel.: +420 556 621 020