

Antenna Java Modem GLONASS & Bluetooth RFID & G Sluetooth RFID & RF cables GSM Antenna IoT & GLONASS UMTS & Oden Sluetooth M2M GLONASS & Oden

GSM ANTENNA

Antenna GSM Patch P31, Dual-band, 0 dBi

AO-AGSM-P31

SECTRON company offers a wide portfolio of GSM antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.




BENEFITS

- Low VSWR
- For direct attaching by solder pad

Technology	GSM
Frequency bands	900/1800 MHz
Bandwidth	-
Gain	0 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 300° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	52 x 12.2 x 1 mm
Weight	1.42 g
Operating temperature	-30 to +90 °C
Execution	Internal
Method of attachment	Soldering
Cable type	-
The cable length	-
Connector type	-

DRAWING

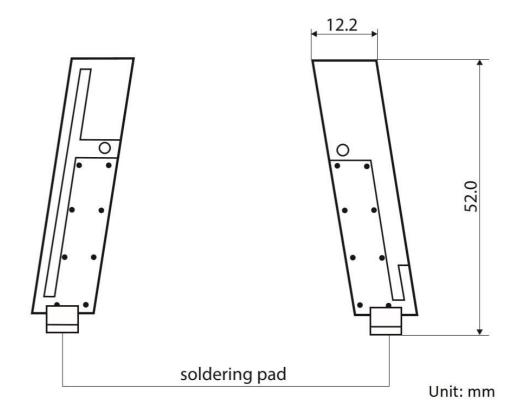

Different connector variants or cable lengths are available on request.

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12 709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ Tel.: +420 556 621 021