

WiFi ANTENNA

Connector Mount SRPK, 2.4/5 GHz, 5 dBi, RP-SMA(pin f)

AW-A2458G-SRPK

SECTRON company offers a wide portfolio of WiFi antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.




BENEFITS

- Low VSWR
- High gain
- Adjustable angle


Technology	WiFi
Frequency bands	2400/5800 MHz
Bandwidth	-
Gain	5 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	90°: 37 x 113 x 13; 180°: 136.3 x Ø 13 mm
Weight	21.24 g
Operating temperature	-10 to +50 °C
Execution	External
Method of attachment	Connector Mount
Cable type	
The cable length	-
Connector type	SMA-RP (f pin)

DRAWING

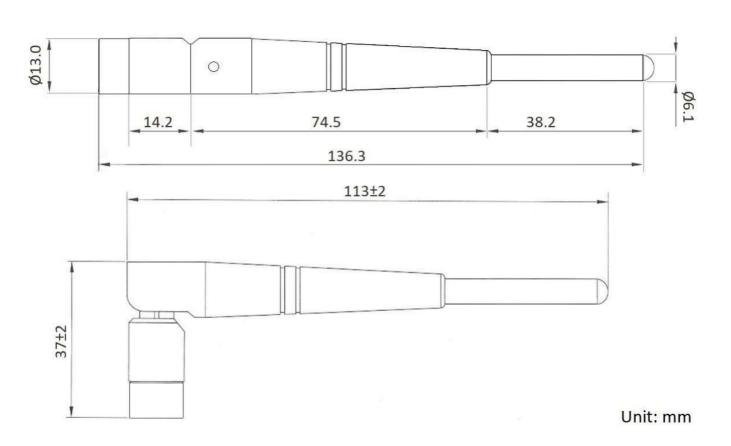


MEASURED GRAPHS AO-A2458G-SRPK

SWR [-] - Standing wave ratio

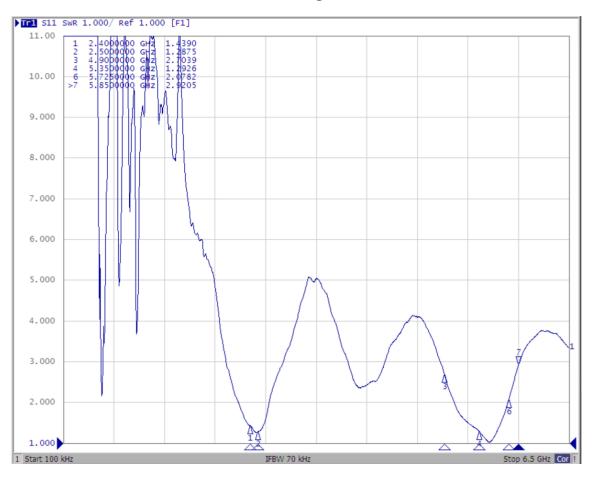

S₁₁ [dB] – Return loss

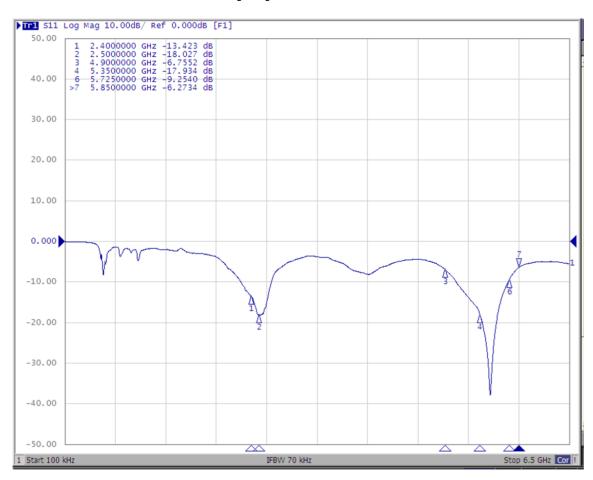

ALL VARIANTS AO-A2458G-SRPK

Different connector variants or cable lengths are available on request.

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12 709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ

Tel.: +420 556 621 020