

Antenna IoT A GLONASS & Bluetooth RFID & G A G LTE A GSM Wi-Fi & Antenna IoT Ante etooth RFID & RF cables GSM Antenna IoT A GLONASS UMTS A Antenna IoT A GLONASS UMTS A Antenna Java Modem GLONASS A Bluetooth M2M C LTE A Rout

GSM ANTENNA

Antenna GSM Magnet Mount 30, Dual-band, 3 dBi, MMCX(m)90°, RG174/3m

AO-AGSM-MG3C

SECTRON company offers a wide portfolio of GSM antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.


BENEFITS

- Low VSWR
- Easy installation
- Omnidirectional suitable for moving devices



Technology	GSM
Frequency bands	900/1800 MHz
Bandwidth	-
Gain	3 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Vertical
Maximum input power	10 W
Power voltage	-
Dimensions	232 x Ø 30 mm
Weight	47.59 g
Operating temperature	-30 to +80 °C
Execution	External
Method of attachment	Magnet Mount
Cable type	RG174/U
The cable length	3 m
Connector type	MMCX(m) 90°

DRAWING

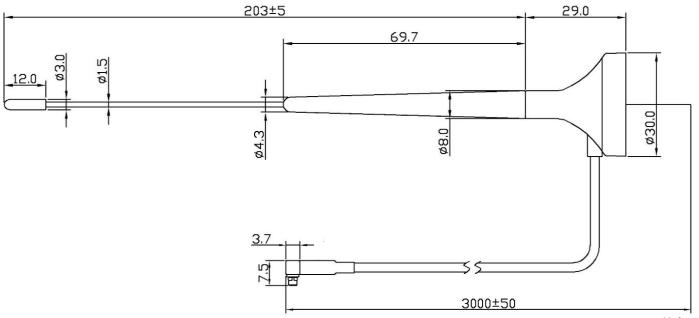

Unit: mm

Different connector variants or cable lengths are available on request.

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12 709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ Tel.: +420 556 621 020